



tecno switch

interruttore crepuscolare da esterno

TWILIGHT SWITCH





Itaca·22



50-60 Hz - 230 Vac
 Design innovativo
 Installazione su parete o palo
 Classe di protezione II
 Scocca resistente a polvere e pioggia
 Resistente ai raggi UV
 Led di segnalazione istantanea del punto di taratura
 Soglia di intervento: 2-200 Lux
 Carico massimo relè: 16A - 250 Vac
 Ritardo di intervento 7s circa
 Ritardo spegnimento 30s (CR301ES), 25 sec (CR302ES)
 CR301ES unipolare
 CR302ES bipolare, interruzione di fase e neutro

50-60 Hz - 230 Vac
 Innovative design
 Wall or pole mounting
 Protection class II
 Dust and rain proof case
 UV-rays proof
 Led for instant signalling of calibration point
 Intervention threshold: 2-200 Lux
 Max relay rating: 16A - 250 Vac
 Switch on delay 7s
 Switch off delay 30s (CR301ES), 25s (CR302ES)
 CR301ES single-pole
 CR302ES double-pole, phase and neutral interruption

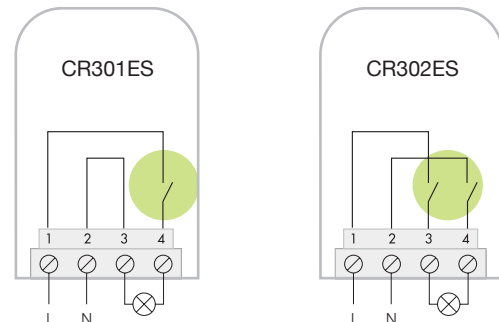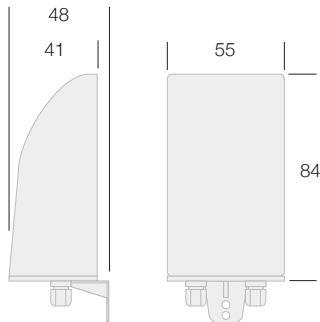

CODICE	INCANDESCENZA	ALOGENA	FLUORESCENZA	LED 230V	TIPO	PESO
CODE	INCANDESCENT	HALOGEN	FLUORESCENT	LED 230V	TYPE	WEIGHT
	W	W	W	W		gr
CR301ES	2300	2000	1100	300*	unipolare 1 NO 16A	100
CR302ES	2300	2000	1100	300*	bipolare 2 NO 16A	110